

G SERIES

Ultra High Resolution. More Efficient Inspection



Ultra-Tek
 "Driving Cost Out Of Your Business"
 +61 448 901 774
 info@ultra-tek.com.au
 www.ultra-tek.com.au
 VISIT OUR WEBSITE

Ultra High Resolution


A highly sensitive VOx detector with up to 640 x 480 (307,200 pixels) IR resolution, provides a distinct thermal vision of the target.

5 Quick Focus Modes

Support for 5 focus modes and a fast focus speed of 2 seconds help save time by providing sharper images for more accurate temperature measurements.

Up to 2000°C Temperature Range

With a measurement range of up to 2000°C (3992°F), it can handle industrial furnace applications, refractory, and inspecting tools/fixtures in metal smelting at these extreme temperatures. (*G41H/G61H only)

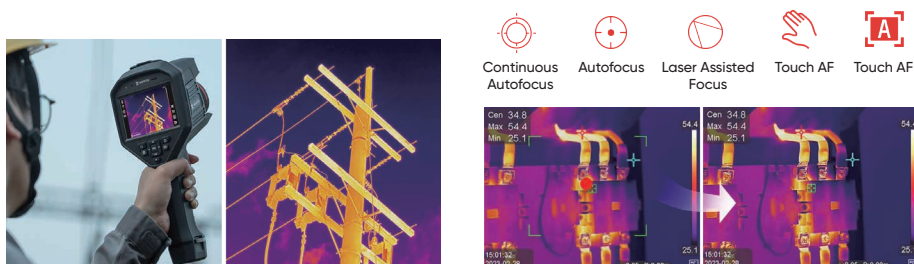


APPLICATIONS




Oil and gas industry



Electric Utilities




Facility Maintenance




Factory


ADD-ON LENSES




G31




Wide Angle 0.5X
HM-G305-LENS1




Telephoto 2X
HM-G320-LENS1



Telephoto 3.3X
HM-G330-LENS1




G41/H & G61/H



Wide Angle 0.5X
HM-G605-LENS1



Telephoto 2X
HM-G620-LENS1



Telephoto 3.3X
HM-G630-LENS1

WHAT'S IN THE BOX



- Handheld Thermography Camera
- 64GB Micro SD card
- Rechargeable Battery (x3)
- Charging Base
- Power Adapter
- International Use Plugs (US/EU/UK/AU) for Power Supply (x4)
- USB 2.0 A to USB Type-C Cable
- Mini HDMI to HDMI Cable
- Lens Cover
- Hand Strap
- Accessory Bag
- User Manual
- Calibration Certificate
- Quick Start Guide
- Packing List
- Carrying Case
- Aperture (G41H/G61H Only)

Model No		G31	G41	G41H	G61	G61H
Infrared Image	IR Resolution	384 x 288	480 x 360	480 x 360	640 x 480	640 x 480
	SuperIR	768 x 576 (442,368 pixels)	960 x 720 (691,200 pixels)	960 x 720 (691,200 pixels)	1280 x 960 (1,228,800 pixels)	1280 x 960 (1,228,800 pixels)
	NETD	< 35 mK (@ 30 °C, F#=1.0)				
	Image Frequency	50 Hz				
	Field of View (FOV)	25° × 19°	18.7° × 14°	18.7° × 14°	25° × 19°	25° × 19°
	Spatial Resolution (IFOV)	1.13 mrad	0.68 mrad	0.68 mrad	0.68 mrad	0.68 mrad
	Focus Mode	Laser Assisted AF/Continuous AF/AF/Manual Focus/Touch AF				
Image Display	Visual Camera	3264 × 2448 (8 MP)				
Measurement and Analysis	Object Temperature Range	-20 °C to 650 °C (-4 °F to 1202 °F)	-20 °C to 650 °C (-4 °F to 1202 °F)	-20 °C to 2000 °C (-4 °F to 3632 °F)	-20 °C to 650 °C (-4 °F to 1202 °F)	-20 °C to 2000 °C (-4 °F to 3632 °F)
	Accuracy	Max (±2°C/3.6°F, ±2%)				
General	Image and Video Formats	JPEG, MP4, Radiometric Video				
	Wi-Fi	802.11 b/g/n (2.4 GHz and 5 GHz)				
	HDMI Interface	Yes				
	GPS & Compass	Yes				
	Battery Operating Time	Approx. 4 hours				